

1ch RTD Transmitter

Model: **SF1R**

Model

SF1R - - -


Input (Burnout: Upscale)
01: Pt100
02: JPt100
(Burnout: Downscale)
11: Pt100
12: JPt100

Input sampling period
01: 25ms
02: 125ms
03: 250ms

Output
01: 4 to 20mA DC 06: 0 to 1V DC
02: 0 to 20mA DC 07: 0 to 5V DC
03: 0 to 12mA DC 08: 1 to 5V DC
04: 0 to 10mA DC 09: 0 to 10V DC
05: 1 to 5mA DC

Socket
1: Screw fall prevention, finger-safe (For Y terminal)
2: For Ring terminal

Power supply
0: 100 to 240V AC
1: 24V AC/DC

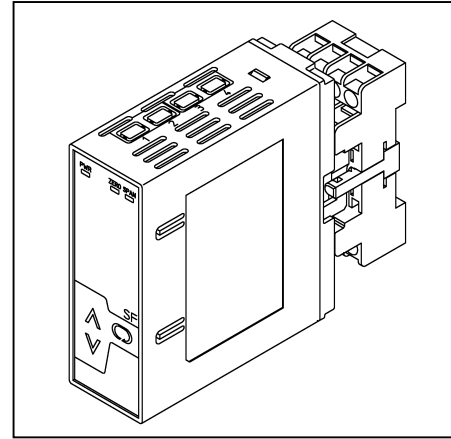

How to Order

Specify a model.
(e.g.) SF1R-010101-1-0
Default value

Input	Pt100: -200 to 850°C
Output	4 to 20mA DC
Input sampling period	25ms

Input Specifications

RTD (3-wire type)

Input detection current: Approx. 0.2mA
Allowable lead wire resistance: 10Ω or less per wire
Burnout: Upscale/Downscale
Input:

RTD	Input range	
Pt100	-200 to 850°C	-328 to 1562°F
JPt100	-200 to 500°C	-328 to 932°F

Minimum span: 50°C (100°F)

Output Specifications

DC Current

Output range	Allowable load resistance	Zero adjustment range	Span adjustment range
4 to 20mA DC	700Ω or less	-5 to 5%	95 to 105%
0 to 20mA DC	700Ω or less	0 to 5%	95 to 105%
0 to 12mA DC	1.2kΩ or less	0 to 5%	95 to 105%
0 to 10mA DC	1.2kΩ or less	0 to 5%	95 to 105%
1 to 5mA DC	2.4kΩ or less	-5 to 5%	95 to 105%

DC Voltage

Output range	Allowable load resistance	Zero adjustment range	Span adjustment range
0 to 1V DC	100Ω or more	0 to 5%	95 to 105%
0 to 5V DC	500Ω or more	0 to 5%	95 to 105%
1 to 5V DC	500Ω or more	-5 to 5%	95 to 105%
0 to 10V DC	1kΩ or more	0 to 5%	95 to 105%

Performance

Accuracy: Within ±0.2% of input span (at 23°C of ambient temperature)

Input sampling period : 25ms, 125ms, 250ms
(Must be specified.)

Response time:

65ms (typ.)(0→90%)(Input sampling period: 25ms)
225ms (typ.)(0→90%)(Input sampling period: 125ms)
425ms (typ.)(0→90%)(Input sampling period: 250ms)

Temperature coefficient : ±0.015%/°C or less

Insulation resistance: 10MΩ or more, at 500V DC
(Input - Output - Power)

Dielectric strength: 2.0kV AC for 1 minute
(Input - Output - Power)

General Structure

Case: Flame-resistant resin Color: Light gray

Front panel: Membrane sheet

Adjustment: Using the front keypad

(1) Press the MODE Key. The ZERO indicator becomes lit. The unit moves to the Output ZERO adjustment mode.

(2) Press the MODE Key in the Output ZERO adjustment mode. The SPAN indicator becomes lit. The unit moves to the Output SPAN adjustment mode.

(3) Pressing the MODE Key returns to Step (1).

If the MODE Key is pressed for approx 3 sec, or if no operation occurs for approx. 30 sec, the unit will revert to the RUN mode.

Indication:

PWR indicator (Green):

Lit when power is turned ON.

Flashes in 0.5 second cycles if non-volatile memory errors occur.


Flashes in 0.25 second cycles if input errors occur.

ZERO indicator (Yellow):

Lit in the Output ZERO adjustment mode.


SPAN indicator (Yellow):

Lit in the Output SPAN adjustment mode.

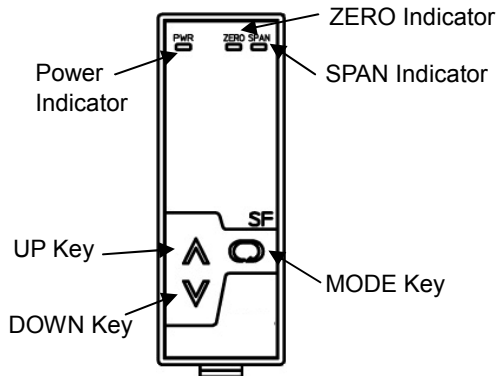


Solderless Terminals


Y Terminal




Ring Terminal



Circuit Configuration, Terminal Arrangement

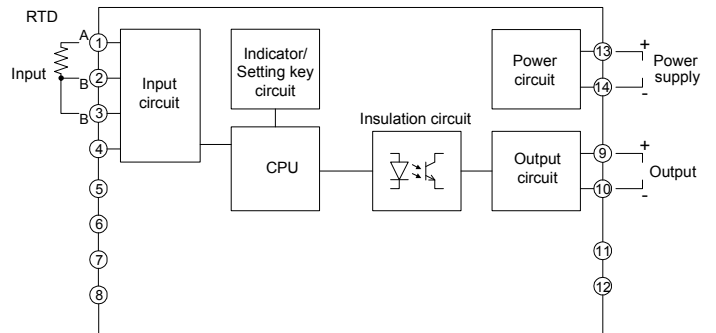

External Dimensions (Scale: mm)

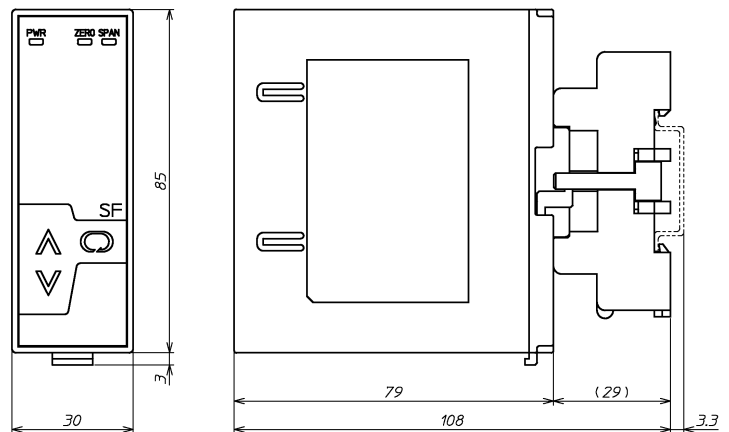

Installation Specifications

Power supply: 100 to 240V AC 50/60Hz

24V AC/DC 50/60Hz

Allowable voltage range: 85 to 264V AC

20 to 28V AC/DC

Power consumption: Approx. 6VA

Ambient temperature: -5 to 55°C

Ambient humidity: 35 to 85%RH (non-condensing)

Weight: Approx. 190g (including socket)

Mounting: DIN rail

Dimensions: W30 x H88 x D108mm (including socket)

Attached Functions

Power failure countermeasure:

The data is backed up in non-volatile IC memory.

Self diagnosis:

The CPU is monitored by a watchdog timer, and when an abnormal status is found on the CPU, the unit is switched to warm-up status turning all outputs OFF.

Environmental Specifications

RoHS directive compliance

Settings

Function keys

(1) UP Key: Increases a numerical value.

(2) DOWN Key: Decreases a numerical value.

(3) MODE Key: Switches from RUN mode to the Adjustment mode, and registers the adjustment value.